



Production and sale Flexibility and adaptability to customers' needs Logistics and assistance service Product reliability and delivery punctuality



High speed doors for ATEX environmentsSelf repairing high speed roll up door ALUMINA, with anodized aluminium frames
and electronic inverter control box,
optical encoder for curtain movement positionFlexible swing door with 220V monophase automation



Nice to meet you!

Since 1983 our company has been manufacturing high speed doors, offering a wide range of high quality products, simple to install, reliable and long lasting and always delivered on time.

Our company has great goals, first of all we want to be innovative, develop and present new models of our products to became the excellence on the market.

(H)

We are well-known and appreciated for the following features:

Production and sale of a complete range of high speed doors: roll up doors, self repairing or special for the food industry or ATEX environments, high speed fold up doors, flexible curtains or flexible swing doors. **Flexibility and adaptability to customers' needs** in order to design and manufacture high speed doors for every sector: logistic sector, industrial sector, commercial activities, health environments, food or ATEX sectors.

Product reliability and delivery punctuality because our company is made up of motivated people, in order to offer the best reliable product, easy and fast to assemble, with prompt delivery.

Logistics and assistance service because we have a warehouse with lots of equipment for the maintenance or manufacture of industrial doors.

VertiGO High speed fold up door



Safe, cheap, suitable for interior and exterior (with intense air depression) Suitable for huge openings

VertiGO is prewired in our warehouse and it comes with all the details needed to guarantee its easy and fast installation, its functionality and safety for users.

Structure, curtain and windows can be customized to satisfy customers requirements and the characteristics of the installation site.


MAIN FEATURES FOR INSTALLATION

- Prewired door. Every door is delivered with cables preinstalled.
- Industry standard made in Europe components. Mechanical, electrical and electronics are made in Europe from selected suppliers for the best performance and reliability.
- Easy fitting with state of the art electronic control box to control and adjust every device and door operation.


MAIN FEATURES

Structure	Standard galuanized Daugler coated of Stainlass Steel on request
Structure	Standard galvanized. Powder coated of Stainless Steel on request.
Wind Load	UNI EN 12-424 Class 2
Dimension	Free passage up to 8000 x H 8000. Bigger dimension on request.
Opening speed	0.9 mt/sec.
Closing speed	0.9 mt/sec.
Motor	Side of Front facing 380V 3phase motor.
Curtain position	Rotating limit switch.
Control Box	Electronic type. Open, Close, Pedestrian, Reset and Emergency stop buttons on cover.
	Power supply 380V 3phase.10 operation mode selectable, Pedestrian opening function.
	Integrated 2 channels Radio receiver.
Emergency opening	Optional counter-weight system for curtain opening in case of power failure.
Safety	Safety photocells in the doorway, Radio controlled safety edge.
Curtain	Standard with horizontal reinforcement tubes. Polyester fabric 900 gr/sqm.
	Fire reaction UNE 23.727-90 Class M2. One vision windows row as a standard.
Curtain colours	White, Green, Mid Grey, Light Grey, Blue, Red, Orange, Yellow. Other colours available on request.
Special curtains	Thermal and Acoustic insulated 3mm.
Certification	UNI EN13241-1 EC Certified


High speed fold up door "VertiGo" - Front Motor

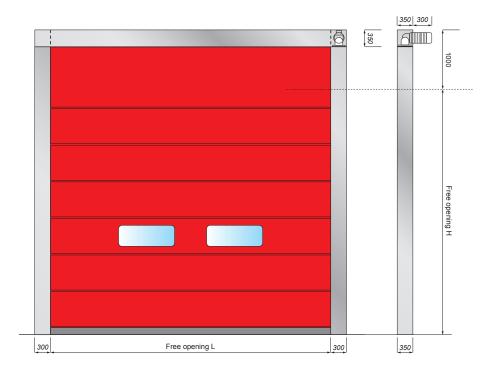

High speed fold up door "VertiGo" - Side Motor

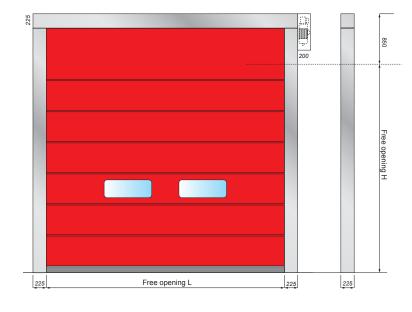

Balanced Folding Door "VertiGo"

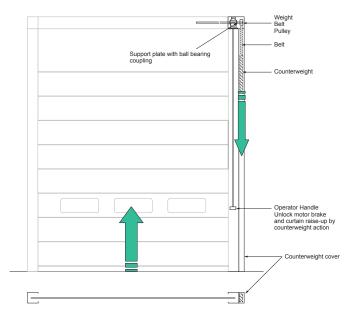



OTHER COLOURS UPON REQUEST







